

Dal 1960 al servizio dello **SPORT**



SCHIAVI **SPORT**

CATALOGO 2020-2021

ELECTRONIC SCOREBOARDS



**ART 2694 FC50H25 - 2694-01 - 2694-02
MULTISPORT SCOREBOARD SUITABLE FOR
MULTIDISCIPLINE USE APPROVED FIBA, LEVEL 3**

ART 2694 FC50H25 - 2694-01 - 2694-02 MULTISPORT SCOREBOARD SUITABLE FOR MULTIDISCIPLINE USE APPROVED FIBA, LEVEL 3

Multisport scoreboard, suitable for medium-size gymnasiums and sports halls.

ART 2694 FC50H25

MULTISPORT SCOREBOARD SUITABLE FOR MULTIDISCIPLINE USE APPROVED FIBA, LEVEL 3

Technical specifications

FIBA approved, level 3.

Viewing distance: 110m for 25cm high digits, 90cm for 20cm high digits.

Viewing angle: 150°.

Displayed functions:

Game time [00:00 - 99:59]: digits 25cm high.

Team scores [0 - 199]: digits 25cm high.

Period [0 - 9, E]: digit 20cm high.

Timeout [3 light indicators per team]: diameter 2.5cm.

Ball possession / Service / Turn [1 light indicator per team]: diameter 2.5cm.

Team fouls / Sets won [0 - 9]: digits 20cm high.

Compliant with DIN 18032-3 standard on "Resistance to damage from balls" No front protection cover is required. You save on the cost of a protective cover, full visibility is guaranteed, and access to the scoreboard is easy.

Wireless communication via console 700 including. Reliable wireless communication: by 2.4GHz FHSS (Frequency Hopping Spread Spectrum) radio transmission to avoid interferences. The use of a wireless system reduces costs by eliminating the need of a cable connection between console and scoreboards.

Suitable for indoor application.

Easy to install. Installation instructions in 5 languages. Supplied with brackets for wall mounting.

Game timer. Using the Control Console you can choose different operation modes depending on the sport selected: game and interval time, count back or forward, display last minute tenths of a second, display time of day, etc.. Clock function to display time of the day, also with unplugged console.

The horn can be sounded manually or automatically when the time expires, producing a strong acoustic signal [120dB(A) at 1m] with adjustable duration and intensity.

Robust container made from powder-coated aluminum. Front panel made from anti-glare polycarbonate.

All the internal parts can be accessed from the front for easy maintenance. Large angle, high quality SMT LED digits, with a typical life of 100,000 hours.

Power supply: 100-240VAC, 50/60Hz, 160VA. Supplied with power supply cable .

Guarantee: 2 years (info).

Dimensions and weight: 140x83x9cm, 22kg.

ART. 2694-01 CASE-700

Carrying case for Console-700

Robust carrying case for easy transport.

ART.2694-02 TIME CONSOLE-03

Additional console, useful for the timekeeper or the 24/14/30 second shot clock operator.

24 seconds or 30 seconds Shot Clocks

Categories: [SCOREBOARDS](#), [ELECTRONIC SCOREBOARDS](#)

ART 2684 - 2684-02 - 2694-03 MULTISPORT PORTABLE SCOREBOARD FOR TABLE WITH DISPLAY

ART 2684 - 2684-02 - 2694-03 MULTISPORT PORTABLE SCOREBOARD FOR TABLE WITH DISPLAY

ART 2684

MULTISPORT PORTABLE SCOREBOARD FOR TABLE WITH DISPLAY, control console placed behind the board for easy use, cm 55x35x9.5, KG 3.6. Equipped with a special network adapter 240V / 12VDC with European plug.

ART 2684 - 02

RECHARGEABLE BATTERY 12v 7ah

ART 2684 - 03

CHARGEABOUT 100 240v / 13



Categories: [SCOREBOARDS](#), [ELECTRONIC SCOREBOARDS](#)




ART.2694-01 CARRING CASE FOR CONSOLE ART 2684

ART.2694-01 CARRING CASE FOR CONSOLE ART 2684 Case for portable scoreboards ART 2684 shockproof, mis cm 60x40x13,5

Categories: [SCOREBOARDS](#), [ELECTRONIC SCOREBOARDS](#)

ART 2690 TIME-TABLE 24" WITH CONSOLE

Shows the timing of the shot and time-out in basketball. One console and two scoreboards viewers. Shows the timing of the shot and time-out in basketball. Possibility to change the timing of the shot and time-out from 1 to 99 seconds - height numbers 30 cm., red colours, readable up to 70 mt. - administration of the 14 seconds rule - green light on the display showing the current counting - Acoustic signal when the time expires on every billboard viewer - supplied cables 1x20 mt 1x40 mt (different sizes on request) - possibility of adding 2 boards 24 " - Power supply 230 Vca 35 VA max - size 2 pcs 29,2x30,4x4,4 cm. 1 pcs 20x8x12,5 cm.. Weight 8,9 kg. - indoor use.

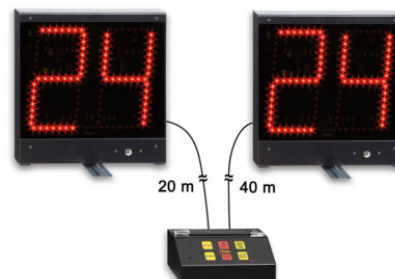

Categories: [SCOREBOARDS](#), [ELECTRONIC SCOREBOARDS](#)

ART 2691A ELECTRONIC BASKETBALL POSSESSION ARROW

Electronic basketball possession arrow alternating possession indicator, distance and viewing angle: 90 mt/150 degree. According to FIBA. Size: 56x23,5x4 cm., weight 1,70 Kg.

Categories: [SCOREBOARDS](#), [ELECTRONIC SCOREBOARDS](#)



ART 2691VA CASE FOR POSSESSION ARROW ART 2691A

ART 2691VA CASE FOR POSSESSION ARROW ART 2691A
Case shock-resistant material - Size: 60x40x13,5 cm.

Categories: [SCOREBOARDS](#), [ELECTRONIC SCOREBOARDS](#)



ART 2720 ELECTRONIC DEVICE VOLLEYBALL TIME OUT - PLAYERS CHANGE

ART 2720 ELECTRONIC DEVICE VOLLEYBALL TIME OUT - PLAYERS CHANGE

Electronic device Volleyball time out - players change
QUOTE ON REQUEST

Categories: [SCOREBOARDS](#), [ELECTRONIC SCOREBOARDS](#)



ART 2688 24-30 SEC. DISPLAY PANEL KIT WIRELESS

Kit consisting of 2 display units 28.5x32x10 cm + control console-700 with case.

Immediate installation on the floor or wall or ... without any cable.

Features: Ball possession time indicator. Digit height: 20 cm.

Distance and visibility angle: mt. 70, 150 °. Red light for expired time.

Display of tenths of a second for the last 5 "(as FIBA regulation).

Resistant to ball hits (DIN 180032-3 standard) and 1 m drop (EN 62368-1 standard). Internal rechargeable battery with high autonomy (+ 25 hours). ATTENTION: The charger is not supplied

(for charging use a common charger for smatphone with micro USB output). Horn: 105 db / 1m. Radio communication: 2.4 GHz

in FHSS mode. Management via console-700 (for those who already own this console we recommend a small additional console - Art.

2694-02 Time

Console-03 - to allow the 24 "employee to operate separately).


Console-03 - to allow the 24 "employee to operate separately).

No power and data transmission cables are needed.

Categories: [NEW ARRIVALS](#), [SCOREBOARDS](#), [ELECTRONIC SCOREBOARDS](#)



ART 2680 - 2680R ELECTRONIC SCOREBOARD FOR SPORTS CENTRES

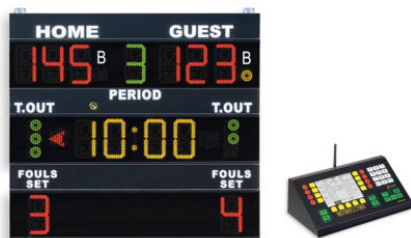

ART 2680 - 2680R ELECTRONIC SCOREBOARD FOR SPORTS CENTRES



ART 2680

ELECTRONIC SCOREBOARD FOR SPORTS CENTRES FIBA approved, console equipped with a large graphical display that allows the control of all the boards of the same series. Electronic scoreboard for basketball, volleyball, futsal, handball, hockey, tennis. Displayed functions: 00:00-99:59 game time, numbers height 30 cm - Display set/game won 0-4, scoring 0/199 numbers height 30 cm., period 0-9 cm numbers height 30 cm. - team fouls/sets won 0/9 numbers height 30 cm. - bonus 1 bright point per team diameter 8 cm. Time out: 3 bright points per team diameter 8 cm. - possession/priority/turn arrow indicators. Technical features: readable 130 meters, 150 degrees viewing angle - Fiba approved - ball shock-resistant according to DIN 18032-3 and UNI 9554 - chronometer: according to the selected sport can be set various modes of operation of play time and interval, count forward or backward, displaying tenths of a second in the last minute of the game, displaying time and date - Car horn: when time expires, it allows the automatic and manual issuance of a loud beep (120db at 1 m) with adjustable duration and intensity - Easy to install: equipped with brackets and dowels for wall mounting - Serial cable mt 50 for connection to the console - sturdy aluminum case, powder coated with anti-reflective polycarbonate front panel - indoor use, weight 60 kg., size 200x180x9 cm.

ART 2680R

ELECTRONIC SCOREBOARD FOR SPORTS CENTRES WITH REMOTE CONTROL FIBA approved, allows to receive data transmitted by the control console Wi-Fi (features such as art. 2680).

Categories: [SCOREBOARDS](#), [ELECTRONIC SCOREBOARDS](#)

2681 RB PANEL DISPLAY 24"

DISPLAY PANEL KIT 24 sec. via radio, FIBA level 3 approved. Kit consisting of 2 24-second displays. 41x29x8.5 cm, Kg. 6 each + 2 radio receivers + 1 time console 03.

24 "timer (0-99) with digits h 20 cm. Distance and visibility angle: 90 m. 150 °. Red light for expired time diam. cm. 8. Horn: allows the manual and automatic emission, at the end of 24 ", of a loud sound signal (120dB at mt. 1) adjustable in duration and intensity. Resistant to ball hits (DIN 180032-3 standard) and drop from mt. 1 (EN 62368-1 standard). Radio communication: 2.4 GHz in FHSS mode.

Power supply: 240Vac, 50-60Hz 70VA. Management via console-700 (for those who already own this console we recommend a small additional console Art. 6294-02 Time Console-03) to allow the 24 "employee to operate separately.



Categories: [SCOREBOARDS](#), [ELECTRONIC SCOREBOARDS](#)



ART 2696 FC50H15 - 2696-01 - 2696-02 FC50H15 MULTISPORT SCOREBOARD SUITABLE FOR MULTIDISCIPLINE USE

ART 2696 FC50H15 - 2696-01 - 2696-02 MULTISPORTSCOREBOARD

Multisport scoreboard suitable for multidiscipline use (basketball, volleyball, futsal, etc.) in small sports halls.

ART 2696 FC50H15

FC50H15 MULTISPORTSCOREBOARD

Technical specifications

Digit height: 15cm. Readability distance: 50m.

Readability angle: 150°.

Displayed functions:

Team scores: [0 - 199]

Game time: [00:00 - 99:59]

Timeout: [3 light indicators per team]

Team fouls / Sets won: [0-9]

Ball possession/Service/Bonus: [1 light indicator per team]

Period: [0 - 9]

Compliant with DIN 18032-3 and UNI 9554 standards on "Resistance to damage from balls".

No front protection cover is required. You save on the cost of a protective cover, full visibility is guaranteed, and access to the scoreboard is easy.

Wireless communication via console 700 including. Reliable wireless communication: by 2.4GHz FHSS (Frequency Hopping Spread Spectrum) radio transmission to avoid interferences. The use of a wireless system reduces costs by eliminating the need of a cable connection between console and scoreboards.

Suitable for indoor application.

Installation instructions in 5 languages. Supplied with bolts and brackets for wall mounting.

Clock function to display time of the day, also with unplugged console. Time expired horn: 2.9KHz, 95db/2m, suitable for not particularly noisy venues.

Sturdy powder-coated aluminum case. Polycarbonate front panel. Display cards easily accessible from the front, with SMT LED technology and average life span of 100,000 hours.

Power supply: 100-240V 85VA. Supplied with power supply cable.

Guarantee: 2 years.

Dimensions: 91x60x9.5cm.

Weight: 10.1kg.

ART. 2694-01 CARRYING CASE FOR CONSOLE-700

Robust carrying case for easy transport.

ART. 2694-02 Time-Console-03

Additional console, useful for the timekeeper or the 24/14/30 second shot clock operator.

Categories: [SCOREBOARDS](#), [ELECTRONIC SCOREBOARDS](#)